


WF-10 Wire feeder is primarily used for TIG and plasma welding. It provide smooth, consistent wire feed for almost all types of welding wire. It is a precision model that perfectly work with variety of automatic welding projects.

Features

- Intuitive graphic touch controller
- Wire retraction function
- Digital display of wire length
- Feed rate is numerically controlled
- Synchronous wire feeding with pulse
- 3 start outputs to work with external devices
- WGP-1 wire guides for proper positioning


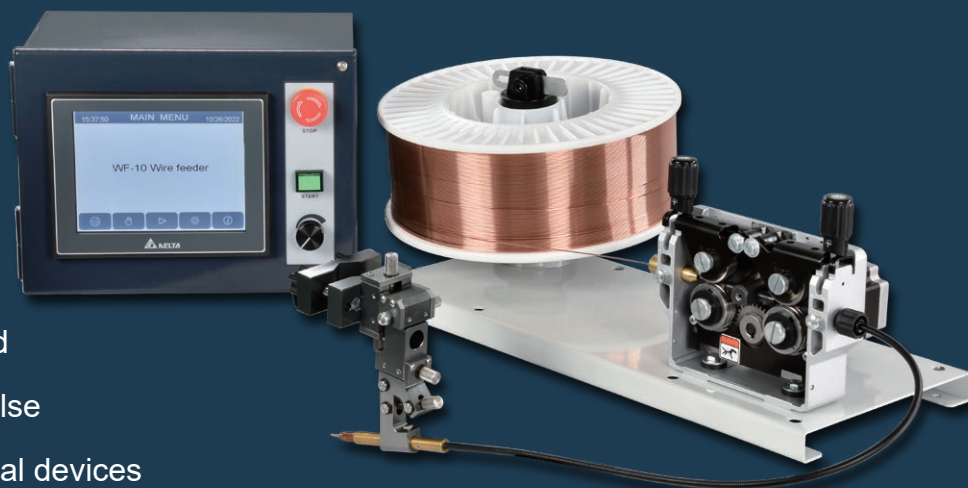


Model	Unit	WF-10
Power input		1Ø 100~240VAC 50/60Hz
Feeding speed	mm/min	10 ~ 10,000
Accuracy		±1%
Wire diameter	mm	0.8 ~ 2.0
Number of roller	pc	4
Dimension (L x W x H)	mm	550 x 240 x 260
Weight	kg	15

※ Specifications subject to change without notice.

Accessories

- Touch controller
- 4 Feed rolls
- Wire guides WGP-1
- Protective spool cover 4807-0001 (options)
- Liner 1m
- Motor cable 1.5m
- Power cable 4.5m

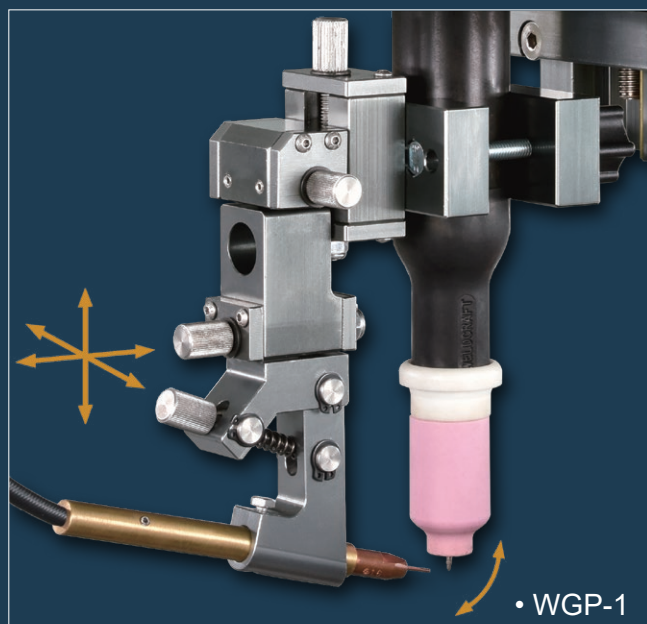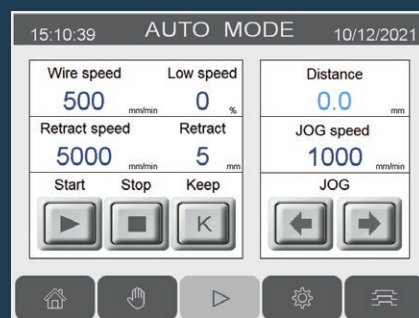

United ProArc Corporation

www.proarc.com.tw

No.8 Gungye 2nd Road, Pingjen Industrial Park, Pingjen Dist., Taoyuan City 324403, Taiwan

Tel : 886-3-4696600 Fax : 886-3-4694499 E-mail : sales@proarc.com.tw

SD-4027AE